

Gear motors for sliding gates – Residential & Commercial



C720
400 Kg



C721
800 Kg


Integrated E721 control board

- Intelligent easy to use features
- Bright display and easy to see LED's
- Master & slave function
- Current sensing virtual encoder

FEATURES

- Direct drive with high mechanical performance – more than 80%.
- Brushless Motor for long life.
- Easy lockable manual release.
- Adjustable open and closing speeds up to 300mm/sec.
- Reliable magnetic limits.
- Smooth and quiet operation.
- One press set up – self-learning.
- Master and slave function.
- Advanced logistics with adjustable output.
- Pedestrian function from transmitter.

Technical	C720	C721
Power Supply	230Vac 50Hz	
Motor supply	24VDC	
Power	170W	290W
Current	7A	12A
Max Torque	18Nm	30Nm
Trust	320N	530N
Pinion	Z28	
Max gate speed	300mm/s	
Limited switches	Magnetic	

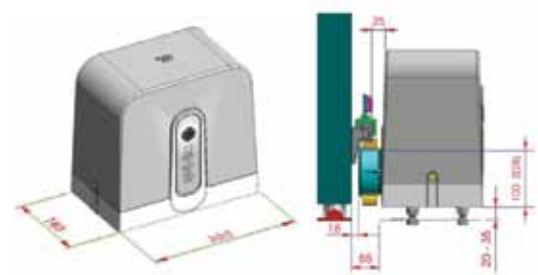

Plug-In 2 Channel Receiver

- 433MHz & 868MHz
- Complete with antenna
- Compatible with all FAAC transmitters



Black SLH Transmitter

POPULAR ACCESSORIES



Self regulating 24V back up battery.



24V UPS for extended power outages from 2 days to 2 weeks.



Safety beams: Up to 30m Wireless and BUS available.



External transformer pack: 24V can go 100m+



Backlit Keypad



Rack



90mm frame insert gate wheel.



Add on receiver.



GSM: Open the gate via your mobile.



90 degree 5mm bracket for rollers to support sliding gate.



Bolt down gate stop including rubber.



40mm rollers: Available in 60, 100 & 150mm.



Plug-in 2 Channel Receiver.



Ground Track